


OVERVOLTAGE PROTECTION

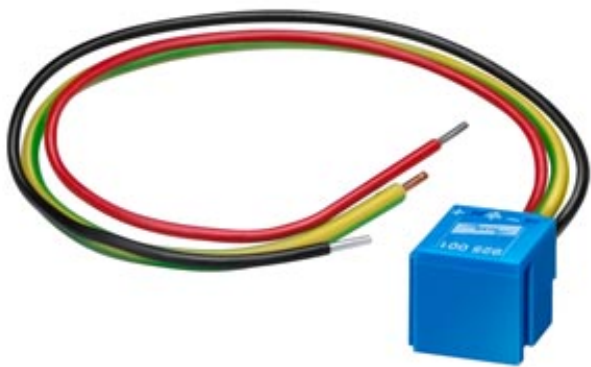

Similar to image

Technical data:		
Type of mounting		others
Design of the electrical connection		others
Design of product / explosion-proof design		No
Product component / remote-signaling contact		No
Continuous operating voltage / with AC / maximum	V	24
Impulse discharge current / at (8/20) µs / nominal value	A	5
Operating voltage		
• with DC / nominal value	V	24
Protection level		
• between PE and N and/or L	V	350
Signal design		without
Continuous operating voltage / with DC / maximum	V	24
Current carrying capacity / nominal value	A	6

Certificates/approvals:

**General Product  
Approval**

**Declaration of Conformity**



**Further information:**

**Information- and Downloadcenter (Catalogs, Brochures,...)**

<http://www.siemens.com/lowvoltage/catalogs>

**Industry Mall (Online ordering system)**

<http://www.siemens.com/lowvoltage/mall>

**Service&Support (Manuals, Certificates, Characteristics, FAQs,...)**

<http://support.automation.siemens.com/WW/view/en/5WG1190-8AD01/all>

**Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)**

[http://www.automation.siemens.com/bilddb/cax\\_en.aspx?mlfb=5WG1190-8AD01](http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=5WG1190-8AD01)

**CAX-Online-Generator**

<http://www.siemens.com/cax>

**last change:**

Jul 1, 2013