


BE-TAL55B2.01

KNX Push Button Light 55 Basic 2 gang, neutral, Pure White glossy finish

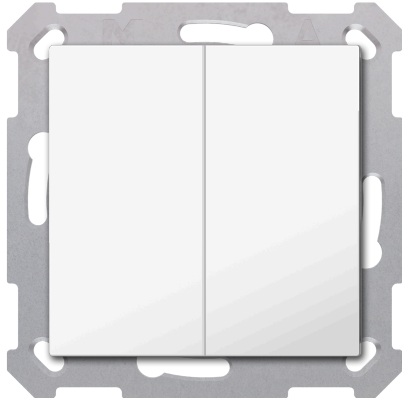

Product description:

The MDT Push-button Lite 55 Basic is a neutral and discreet KNX push-button, suitable for 55 mm switch ranges from various manufacturers. The vertically arranged buttons can be set as a button pair (two-surfaces) or as individual buttons. In addition to switching, dimming, blinds, scenes or sending values, there are numerous functions to choose from. The Push-button Lite 55 Basic has 4 integrated logic modules.

Product functions:

- Suitable for 55 mm switch ranges e.g. MDT assortment 55, GIRA Standard 55, E2, Event, Esprit, BERKER S1, B3, B7, JUNG A 500, A PLUS, A CREATION, AS 500, A 550, A FLOW or MERTEN 1M, M-Smart, M-Plan, M-Pure
- The buttons can be configured as pairs or as singular buttons
- Singular and double Push-button operation for switching, dimming, shutters, values
- Toggle up to four values or scenes
- Short/Long button press with 2 objects
- **Innovative group control with long/extra long button press**
- Multitouch-function, sends up to 4 values on the same or different objects
- 4 Logic blocks
- Installation in an installation box using the included installation frame
- Integrated Bus coupler
- 3 year warranty

Technical data:

Device	Device type	BE Push-button	
	Article Number	BE-TAL55B2.01	
	EAN / GTIN	4251916110772	
	Colour	Pure White, glossy finish	
	Dimensions (H x W x D)	55 x 55 x 26 mm	
	Weight, gross (incl. packaging)	0.066 kg	
	Protection classification	IP20	
	Installation type	Flush mounted	
	Included carrying ring	Carrying ring A	
	Installation position	any	
	Weight, net	0.038 kg	
	Operation	Number of buttons	2 Push-button pairs / 4 Push-buttons
		Symbol	Neutral
KNX	Nominal voltage KNX	30 V DC SELV	
	Voltage range KNX	21 ... 31 V DC SELV	
	Typical power consumption KNX bus	< 0,5 W	
	KNX Medium	TP-256 with long frame support	
	KNX Application	as of ETS 4	
Environmental conditions	Ambient operating temperature	0 ... 45 °C	
	Storage	-20 ... +55 °C	
	Humidity	< 95 %	
	Condensation permissible	No	
Connections	Temperature sensor	Without	
	KNX connection type	KNX terminal	
	KNX cable cross section	0.6 ... 0.8 mm, solid conductor	

Wiring diagram:

