



SPIT DRILL



APPLICATION

- Fixing in all soft materials (aerated concrete, gypsum blocks, plasterboard),
- Small electrical accessories : junction boxes, trunking, small light fittings.

MATERIAL

- Body made of 6.6 glass-fibre reinforced polyamide
- Special screw supplied, head type PZ2


Self drilling anchor for plasterboard & aerated concrete

Technical data

TYPE	Max thick of part to be fixed	Ø thread	Ø anchor head	Ø screw head	Screw length	Total anchor length	CODE
	mm	mm	mm	mm	mm	mm	
	t _{fix}	d	–	D	L1	L	
TP 12	12	3,0	9,5	8,6	25	30	061630

NOTE : Predrilling with HSS drill bit is required in laminated plasterboard or gypsum block : Ø 5 mm
in aerated concrete : Ø 5 mm

Recommended and ultimate loads (kN)

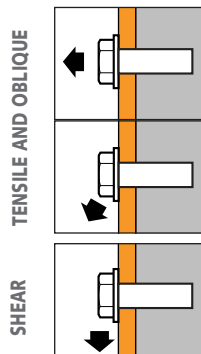

TYPE	Aerated concrete		Plasterboard BA 13	
	N _{rec}	N _{u,m}	N _{rec}	N _{u,m}
TP 12	0,046	0,23	0,044	0,22

TYPE	V _{rec}	V _{u,m}	V _{rec}	V _{u,m}
	TP 12	0,15	0,75	0,16