


SCN-IP000.03

KNX IP Interface with IP Secure and Data Secure, 2 SU MDRC

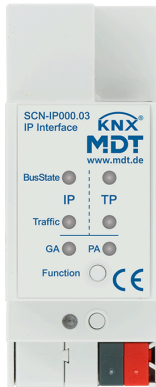

Product description:

The MDT IP Interface creates the link between the KNX bus and the Local Area Network (LAN). It enables programming and diagnosis of the KNX bus via the network. Up to 4 simultaneous tunneling connections to other network devices are possible. Support of KNX IP Secure and KNX Data Secure.

Product functions:

- for bidirectional connection between PC and KNX via TCP/IP
- 4 simultaneous connections possible
- **Enables bus programming via TCP/IP**
- **Power supply via KNX bus, no external power supply required**
- **Encrypted email transmission**
- **Time server to send date and time to the KNX bus**
- **Updateable firmware**
- **Supports extended group addresses**
- **KNX IP Secure and KNX Data Secure (as of from ETS 5.7.2)**
- **Secured access to KNX Bus through IP Secure with security key**
- Fast application download (long frame support as of ETS 5)
- 3 year warranty

Technical data:

Device	Device type	SCN IP Interface
	Article Number	SCN-IP000.03
	EAN / GTIN	4251916100100
	Installation width	2 SU / 36 mm
	Dimensions (H x W x D)	90 x 36 x 72 mm
	Weight, gross (incl. packaging)	0.095 kg
	Protection classification	IP20
	Installation type	MDRC, DIN rail 35 mm
	Installation position	any
	Weight, net	0.075 kg
	Inputs	Ethernet
KNX	Nominal voltage KNX	30 V DC SELV
	Voltage range KNX	21 ... 31 V DC SELV
	Typical power consumption KNX bus	< 0,8 W
	KNX Medium	TP-256 with long frame support
	KNX Application	as of ETS 5, ETS 4 without KNX Secure
	KNX Secure	KNX Data Secure, KNX IP Secure
	Number of simultaneous KNX tunneling connections	4
Environmental conditions	Ambient operating temperature	0 ... 45 °C
	Storage	-20 ... +55 °C
	Humidity	< 95 %
Connections	Connection type	LAN, RJ45 socket
	KNX connection type	KNX terminal
	KNX cable cross section	0.6 ... 0.8 mm, solid conductor

Wiring diagram:

